


DURABUILT™ TRACKS BUILT TO LAST

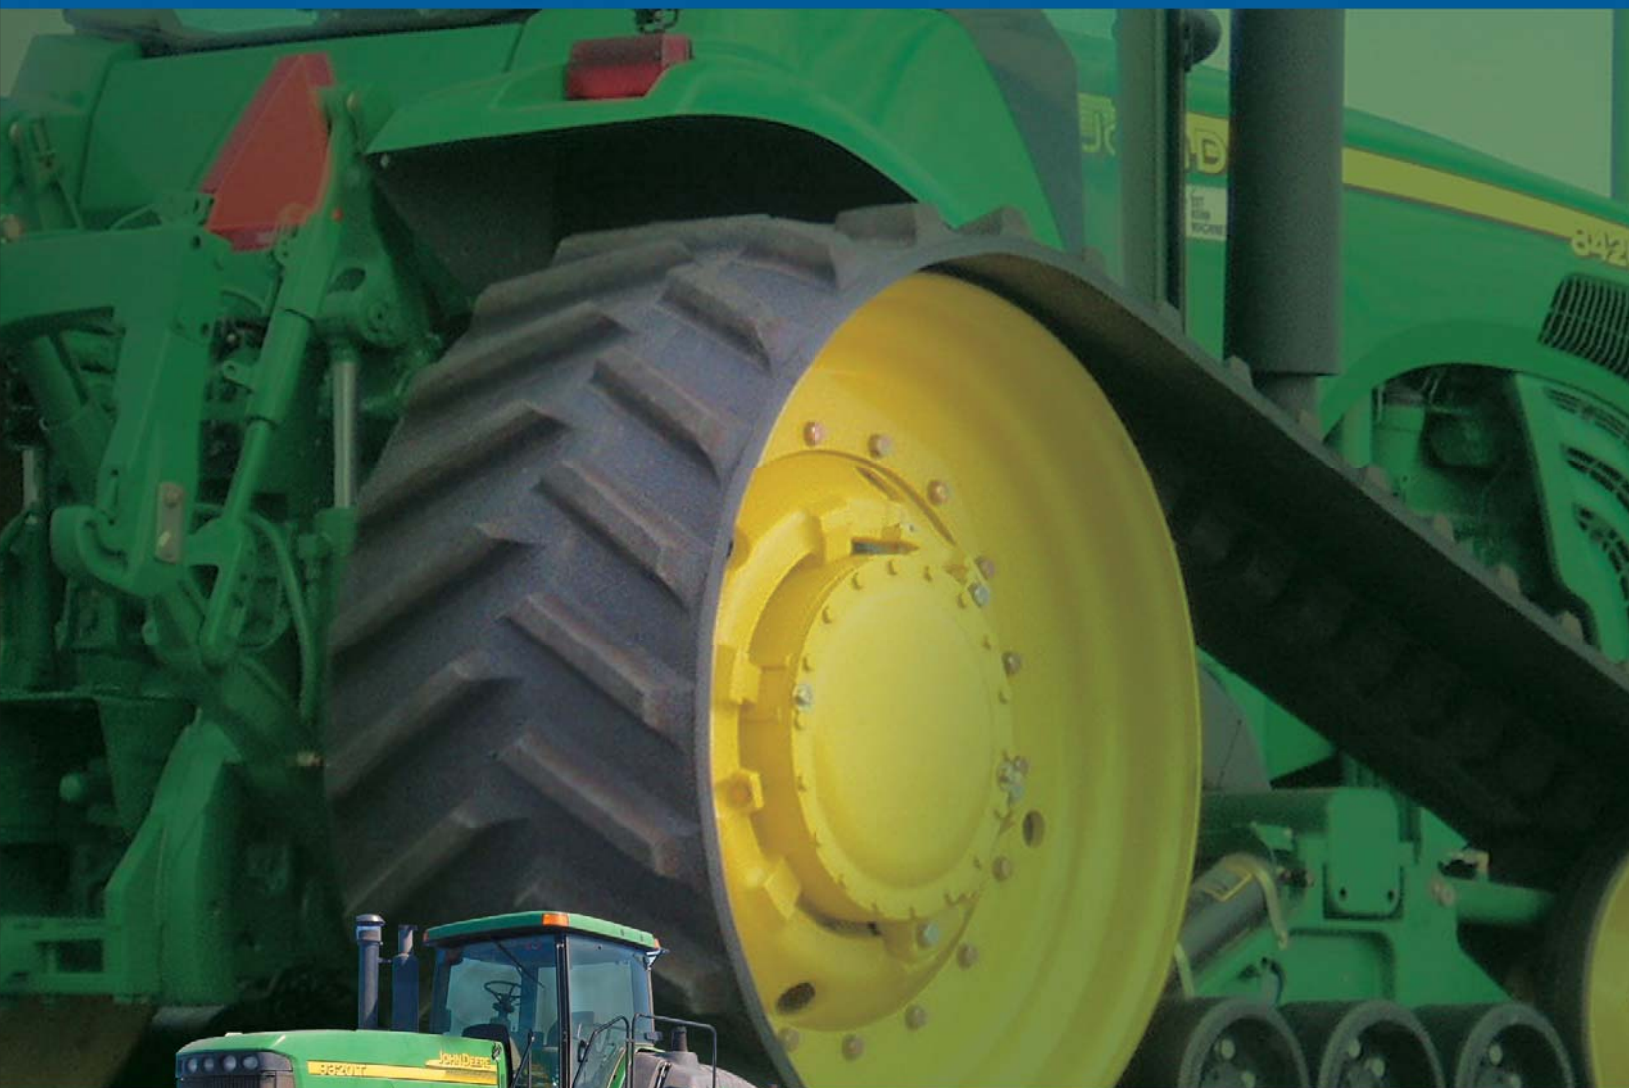

JOHN DEERE 9000T SERIES 378" CIRCUMFERENCE

DURABUILT™ 2500

- Our most economical track.
- Suitable for light to medium-duty agricultural applications.
- Carcass and guide lug designs meet OEM requirements.
- Good balance of track performance and value.

DURABUILT™ 3500

- High-quality, long-life track.
- Designed for all agricultural applications.
- Heavier carcass and treadbar volume for increased track life.
- Ideal choice where added durability is desired.

DURABUILT™ 5500

- Most durable track available on the market.
- Best option for extreme agricultural and construction applications.
- Larger main cable and heavier carcass provide greater tear strength.
- Extra treadbar and guide lug volume for roading and sidehill use.
- The ultimate in rubber track performance.



UNMATCHED CHOICES FOR EVERY TRACK APPLICATION

At Camoplast, making tracks is our business. All our tracks benefit from our constantly improving rubber track technology in a wide variety of applications in the agriculture, industrial, and recreational industries.

Durabuilt™ tracks are the culmination of almost 50 years of research and development by the world's leading agricultural rubber track experts. Every day, our track designs demonstrate proven reliability for the most prominent OEM names in the agricultural industry.

Available Widths

30"

The 30" track is the best overall width for any kind of primary and secondary tillage work.

Series	Camoplast	OEM	Treadbars				Guide Lugs		Carcass	
	Part Number	Part Number	# Treads	Height	Tip Width	Pitch	# Guides	Length	Thickness	Ply Layers
High Yield	680-0045	R208162	84	2.5"	1.5"	9.0"	84	3.1"	1.18" (30 mm)	3
Durabuilt™ 3500	633-3019	R257977	92	2.7"	1.6"	8.2"	54	4.5"	1.34" (34 mm)	3
Durabuilt™ 5500	653-3010	R241748	92	2.75"	2.7"	8.2"	54	5.25"	1.61" (41 mm)	4

36"

The 36" track provides additional floatation over the 30" offering. The extra width helps minimize compaction, provides additional tread life, and minimizes berming during turns.

Series	Camoplast	OEM	Treadbars				Guide Lugs		Carcass	
	Part Number	Part Number	# Treads	Height	Tip Width	Pitch	# Guides	Length	Thickness	Ply Layers
High Yield	680-0046	R208163	84	2.5"	1.5"	9.0"	84	3.1"	1.18" (30 mm)	3
Durabuilt™ 3500	633-3606	R257978	92	2.7"	1.6"	8.2"	54	4.5"	1.42" (36 mm)	4
Durabuilt™ 5500	653-3601	R241749	92	2.75"	2.7"	8.2"	54	5.25"	1.61" (41 mm)	4



FOR MORE INFORMATION:
www.camoplast.com
 1-88-traction
agtracks@camoplast.com